
# Quick Guide **Model CL-60**

**Amplified DECT** Telephone with Talking CID & Talk-Back Feature

Serene Innovations, Inc. 14615 Carmenita Rd. Norwalk, CA 90650 Tel: 562 407 5400



# **CONTENTS AND PARTS CHECKLIST**



Handset









User Guide





To AC Outlet

AC Adapter

#### **INSTALLATION DIAGRAM**

1. Install rechargeable batteries in handset (included) and base (batteries not included) as shown.

Base

- Connect AC adapter and phone cord to the base as
- Charge the handset in the base for 24 hours (or over night) before initial use.
- Answering an incoming call 1. Press button when phone rings.

(Press to engage speakerphone if need).

2. Press button to end the call.

#### Making a Call

- 1. Enter phone number and confirm on display.
- 2. Press button to go on-line and dial.
- (Press to engage speakerphone if need).
- 3. Press button to end the call.


# AMP Function, Volume & Tone Controls

- . During a call, Press AMP button to toggle amplify function. <u>Caution:</u> When it is On (illuminated), an extra level of amplification is added to the receiver volume.
- 2. Press Volume buttons (on the side) to adjust the volume level (VL1 to VL5).
- 3. While AMP is ON, press T/▲ or T/▼ buttons to select a tone setting (T1 to T4) for best voice clarity.

# Automatic AMP & Talking Function Switches -

- 1. Open battery compartment cover to expose two small slide switches.
- 2. Set Switch 1 to ON if you want AMP to be ON every time. 3. Set Switch 2 to ON for talking

CID and talking keypad.



(Note: Both switch functions can be altered by changes made in "HS **SETTINGS**" sub-menu and vice-versa)

#### **Programming One-Touch Memories**

- 1. While off-line, enter phone number and confirm.
- 2. Press and hold M37 (or M1, M2) for 5 seconds to save.

# 3. To dial the number on display, just press [5].

- **Dial from a One-Touch Memory**
- 1. While off-line, press M37 to confirm number.
- 2. Press to go on-line and dial.
- 3. Press 🔁 to end the call.

#### **Outgoing Call List**

- 1. While off-line, press 

  T/▼ first to see the last call made.
- 2. Press T/▲ or T/▼ to review the last ten calls made.
- 3. To dial the number on display, just press 🔊 (To copy to Phone-Book, press and then scroll to sub-menu option. Press MENU/8 to confirm.)
- 4. Press to end the call or exit to off-line.

#### **Incoming Call List**

(Must subscribe to phone company CID service)

- 1. While off-line, press first to view the latest CID info.
- 2. Press T/▲ or T/▼ to scroll the incoming call list.
- 3. To dial the number on display, just press 🔊 (To copy to Phone-Book, press MENU/S) and then scroll to sub-menu option. Press MENU/8 to confirm).
- 4. Press to end a call or return to off-line.

#### **Create Phone-Book Entries**

- 1. While off-line, press MENU/

  and then 


  T/▼ to scroll to "Phone Book".
- 2. Press MENU/R to confirm.
- 3. Press T/▲ to scroll to "NEW ENTRY".
- 4. Press MENU/8 to confirm. Screen displays "NAME?".
- 5. Type in name and then press MENU/8 to save.
- 6. Screen displays "NUMBER?".
- 7. Type in number and press MENU/ to save.
- 8 Screen displays "MELODY 1" and sounds a melody
- 9. Press MENU/SI to save Screen displays "NEW ENTRY". Press to end, or go to Step 4 for another entry.

#### Trouble Shooting

- Q1: Base Charging Indicator is not on when handset is placed on the base.
- Ans: Move the handset slightly to improve contact.
- Q2: No CID information on an incoming call.
- Ans: Check your subscription with your phone company. Q3: No Dial tone.
- Ans: Check AC adpater and phone cord connection. Make sure you're not too far from the base. If this is a new handset, you must register it to the base before using. Q4: No display on handset.
- Ans: Verify battery is OK; make sure the handset is not power-off.
- Q5: Handset does not ring.
- Ans: Verify battery is OK; verify handset is not powered off; verify "Do-Not-Disturb" is not active.
- Q6: Why is the red flasher always blinking? Ans: This indicates you have voice mail waiting in your provider's voice mail server. Or, you have missed a call; reviewing incoming call list clears this indicator.
- Q7: Static noise on the line.

Ans: Your phone may be located near a touch lamp microwave, or other appliance,

## **FEATURE LIST AND OVERVIEW**

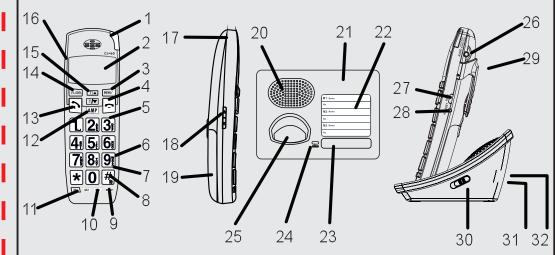

- 1. In-Use / Ring Flasher / Voice mail / Missed Call indicator
- 2. LCD display
- 3. MENU/SI button: Press to access menu or sub-menu option; during a call, press to mute / un-mute the microphone.
- 4. button: Press to end a call or return to idle mode.
- 5. **Keypad**
- 6. Auto-Amplifier Switch: Enables automatic AMP function.
- 7. Talking CID/ Talking Keypad Switch: (6 & 7 are in battery compartment).
- 8 |#| button: Hold it for 5 sec. enables "Do-Not-Disturb".
- 9. RD/P button: Redial / Pause key.
- 10. M2 M3 buttons: One-touch memory
- 11. M1 button: One-touch M. that activates speakerphone.
- 12. AMP (Amplify) button with indicator: Press to engage extra handset receiver amplification.
- 13 button: Press to make or answer a call. During a call, press to engage speakerphone.
- 14. FL/DEL (Flash / Delete) button: press to activate call waiting, or to delete a character entry.
- 15. T/▲ and T/▼ buttons: Press to change tone control, to scroll menu options.
- 16. Speaker
- 17. Hole for lanyard (not included).
- 18. VOLUME Up/Down (side)
- 19. Battery Compartment Cover
- 20. Base Ringer
- 21. Base Flasher / In-Use Indicator
- 22. One-Touch Memory Directory Label
- 23. Page Button: Press to page all registered handsets.
- 24. Charge Indicator
- 25. Cradle
- 26. Audio Jack: For receiver audio ouput.
- 27. Page button: Press to intercom or transfer a call.
- 28. Headset Jack: For cordless phone headset.
- 29. Belt Clip
- 30. Base Ringer Volume Control
- 31. AC Adapter Jack (rear): For connection to power
- 32. Phone JACK (rear): For connection to phone line

## **Handset Display Screen Icons**

- 1. Antenna strength
- 2. Time & Date
- 3. New calls; turn off after all new calls are reviewed
- 4. # of new calls not yet review; (# of old calls if "NEW" is off)
- 5. Battery strength indicator (3 bar= max; no bar=min) 9-6. Volume level - VL1 to VL5
- 7. Tone setting T1 to T4 (effective when AMPLIFY is on)
- 8. TALK (or SPEAKER) Call timer (HH:MM:SS)

**Y** 4:55 **PM** 10/08 NEW 12 00 - 19 - 45TALK T3 VL5

#### **Register A New Handset**

- 1. Press and hold PAGE button on base for 5 seconds so it goes into Registration mode (confirm by a double beep & flashing LED).
- 2. Press and hold PAGE on handset to register.
- 3. Wait for a confirmation tone.

#### No Ringing on Incoming Calls (Do-Not-Disturb)

- While off-line, press and hold [H] for about 5 seconds to enable. Display will alternate between "NON DISTURB" and "HS #". Handset will not ring.
- For handset to ring again, press and hold # for 5 seconds to turn off "NON DISTURB".

#### Power Down A handset

- 1. While off-line, hold for 5 seconds to power down.
- 2. To power up, press and hold for 5 seconds.
- 3. Wait for a confirmation tone before using. This indicates handshaking has been established with base.

#### **Reset Handset to Factory Default**

(Phone-book entries are not affected by reset)

- 1. While off-line, press MENU/W to enter menu mode
- 2. Press T/▲ 2-times to see "HS SETTINGS". Press MENU/® to select. Display shows "AUDIO SETUP". Press TA to find "HS DEFAULT"
- 3. Press [MENU/8] to confirm and display asks for "PIN ?". 4. Enter default PIN "0000" and press MENU/SI to confirm.
- 5. Wait for a confirmation tone and then press. to exit

#### -Swapping Handset Batteries with Base Batteries: -

Handset and base batteries are inter-changeable. In the event that handset batteries are running low, it is acceptable to swap the handset batteries with two from the base. This eliminates the handset re-charge time.

Note: A fully charged handset battery can provide 8 hrs of talk time (80 hrs standby). Base batteries can provide ~4

hrs of backup. After a temporary power outage, it may take 1 to 2 minutes for the handset to self re-register with base.

## **Menu Flow Chart**

**1. CALL LOG**: → Received → Dialed 2. PHONE: → List New Entry → Edit Record— Delete Record → Delete All → Memory Status BOOK → Delete HS → Ring Setup → Dial Mode 3. BS (BASE): SETTINGS → Flash Time → Modify PIN → BS Default 4. HS (Handset): → Audio Setup → Ring Setup → Tone Setup — Language → HS Name → Auto-Answer<sup>-</sup> SETTINGS → Barring → Date & Time → Area Code → Select Base → HS Default

# Navigate The Main Menu & Sub-Menu:

- 1. While off-line, press MENU/S to enter main menu; Screen shows "CALL LOG".
- 2. Press T/▲ or T/▼ to scroll thru all menu options.
- 3. Press MENU/8 to select a menu option to change.

**5. REGISTRATION:** → Base 1 +

- 4. Press T/▲ or T/▼ to scroll sub-menu options; press MENU/∞ to select a sub-menu option; press T/▲ & T/▼ to scroll if necessary.
- 5. Press MENU/SI to select an option or confirm a change.
- 6. If necessary, press FL/DEL to return to a previous menu level.
- 7. When finish, press to exit to off-line.